



500 W 6GHz Coaxial Attenuator



Standards
NF C 96-315
MIL-DTL-3933



Impedance	50 Ω \pm 5%
Frequency	DC - 6 GHz
Max VSWR	\leq 1.30 at 6 GHz
Temperature range	-55 to +55 °C
Average power @ 25 °C	500 W
Cooling	Forced air
Weight	6 kg

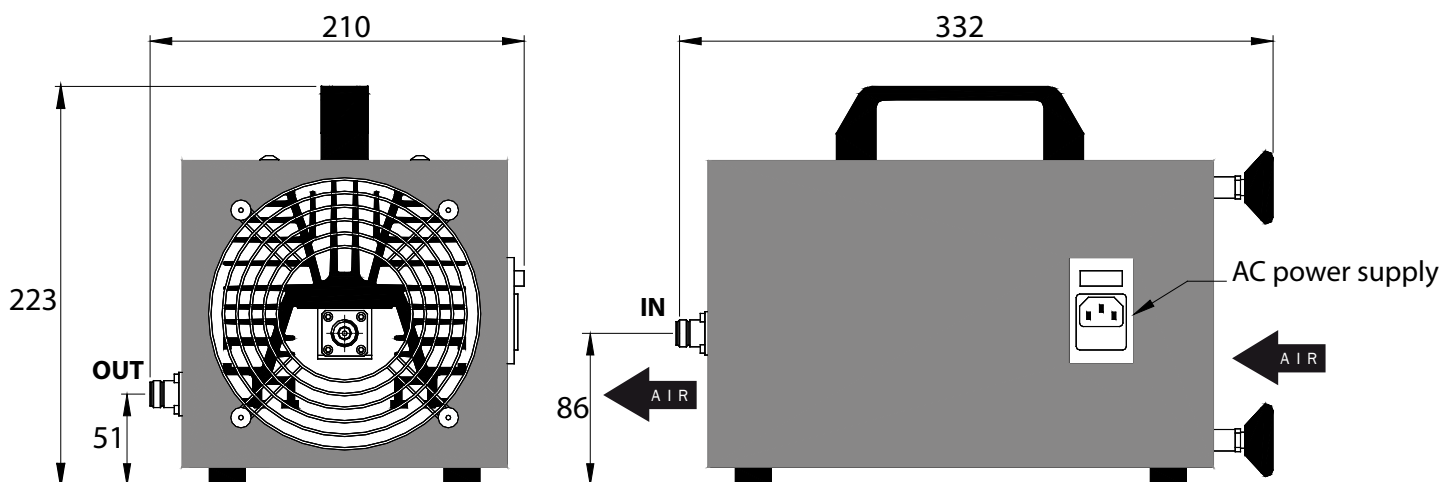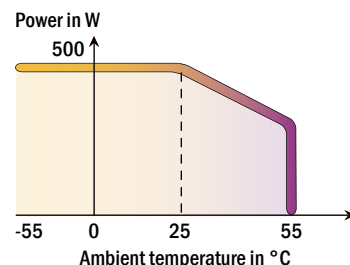

Dimensions in mm

Attenuation (dB)	P/N	Connector	AC power supply	Accuracy $\pm\Delta\alpha$ (dB)
40	16-0657	N f/f	220 V - 50/60 Hz	2

Other attenuations on request
Other connectors on request

