



250 W BeO Stripline Termination

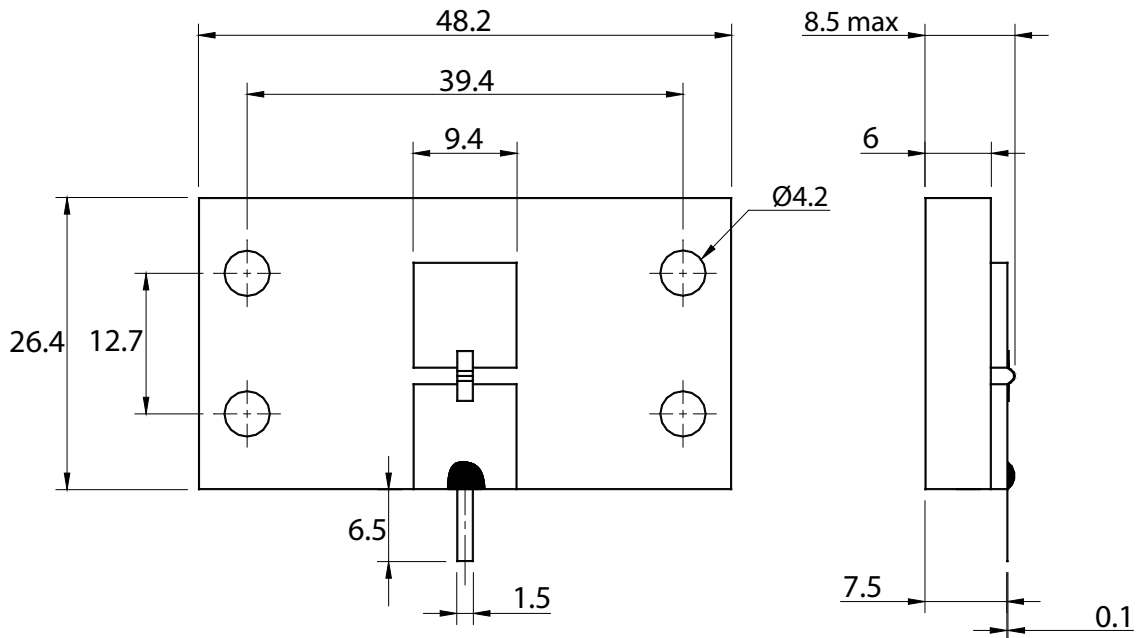

Standards
NF C 96-315
MIL-DTL-39030

Substrate	BeO
Resistive film	Thick film
Tab/Plating	Ag
Protection film	Epoxy
Mounting flange/Plating	Cu/Ni
Tab attachment	Brazed with epoxy encapsulation

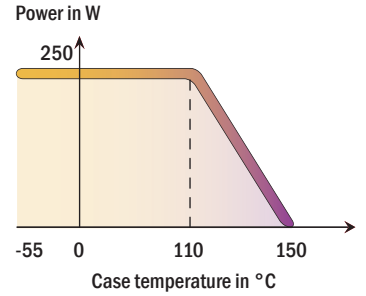

Dimensions in mm

mm	inch
0.1	0.004
1.5	0.059
4.2	0.165
6	0.236
6.5	0.256
7.5	0.295
8.5	0.335
9.4	0.370
12.7	0.500
39.4	1.551
48.2	1.898

P/N	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR
17-0653	5	250	50	1.25*

* VSWR \leq 1.06 at 860 MHz

