



4 kW Forced Air Oil Cooled Loads



Standards
NF C 96-315
MIL-DTL-39030



Impedance	50 Ω \pm 5%
Frequency	DC - 1 GHz (on request DC-2,5 GHz)
Max VSWR	\leq 1.10 at 1 GHz
Temperature range	-25 to +55°C
Average power @ 25°C	4 kW
Cooling	Oil + forced air
Weight	55 Kg

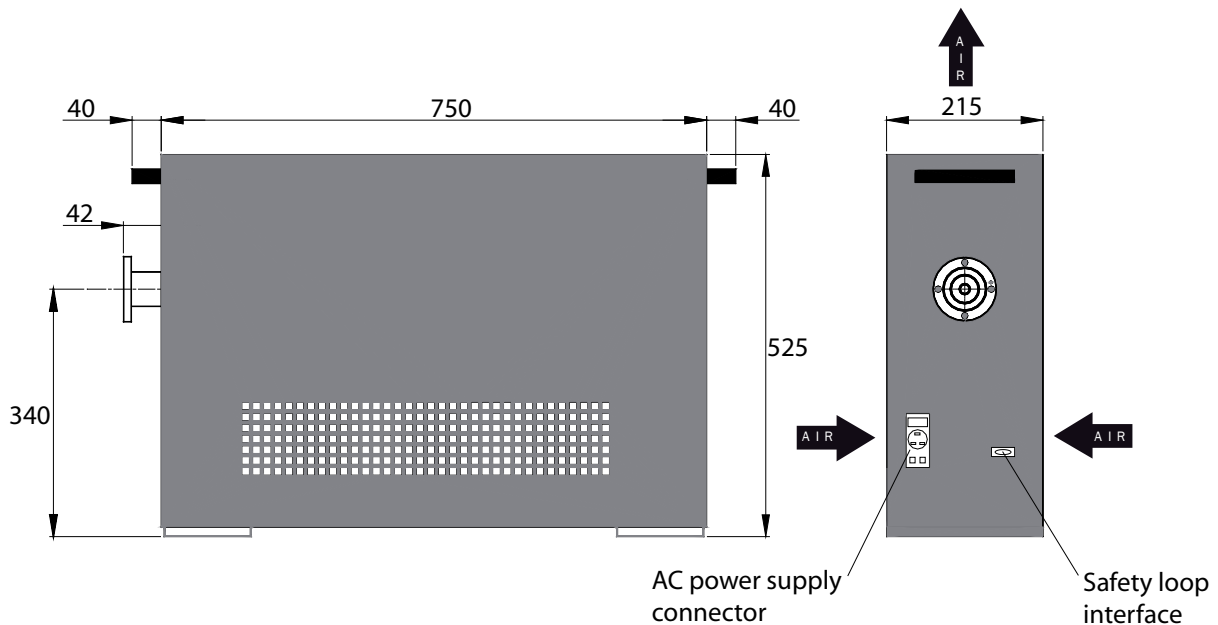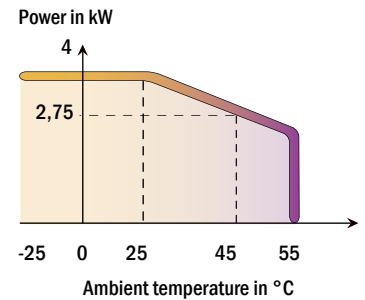

Dimensions in mm

P/N	Connector	AC power supply
17-0708V*	EIA 1.5/8"	220 V - 50/60 Hz

Option		
	FM40	VSWR \leq 1.02 from 87 to 108 MHz for FM applications
	BIII	VSWR \leq 1.05 from 170 to 230 MHz for BIII applications
	NU	VSWR \leq 1.05 from 470 to 860 MHz for DVB applications
*included	V	Fans on/off depending on RF power applied
	R	Swivel castors

Instruction manual and wiring diagram available on request

