



Standards
NF C 96-315
MIL-DTL-39030

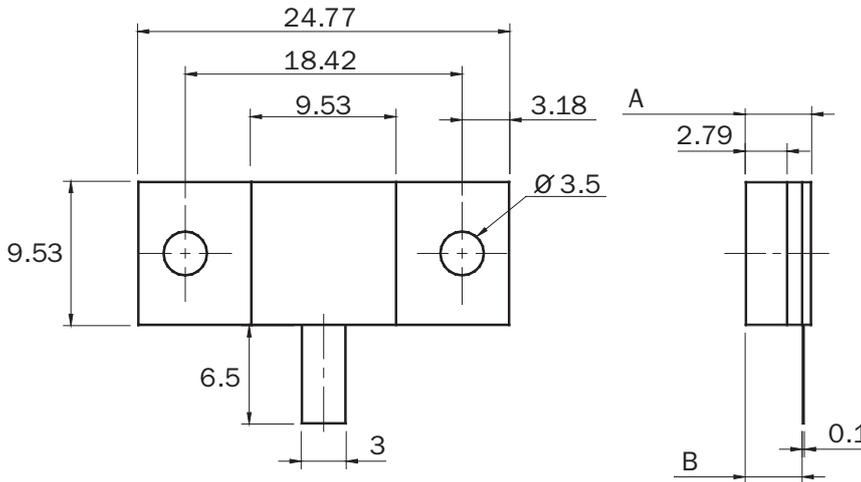

Substrate BeO
Resistive film Thick film
Tab/Plating Ag
Mounting flange/Plating Cu/Ni
Cover substrate Al₂O₃

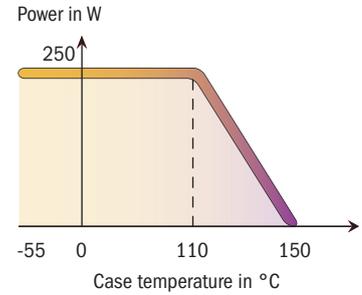

Dimensions in mm

mm	inch
0.1	0.004
2.79	0.110
3	0.118
3.18	0.125
3.5	0.138
3.8	0.149
4.69	0.185
4.9	0.193
5.7	0.224
6.5	0.256
9.53	0.375
18.42	0.725
24.77	0.975

P/N	Frequency (GHz)	Power (W)	Impedance (Ω ± 5%)	Max VSWR	A (mm)	B (mm)
17-0525	1	250	12.5	3.6	4.9	3.8
17-0340	1	250	50	1.30	4.9	3.8
17-0357	3	250	50	1.25	4.9	3.8
17-0469	0.3	250	100	2	4.9	3.8