



75 kW Water cooled Load

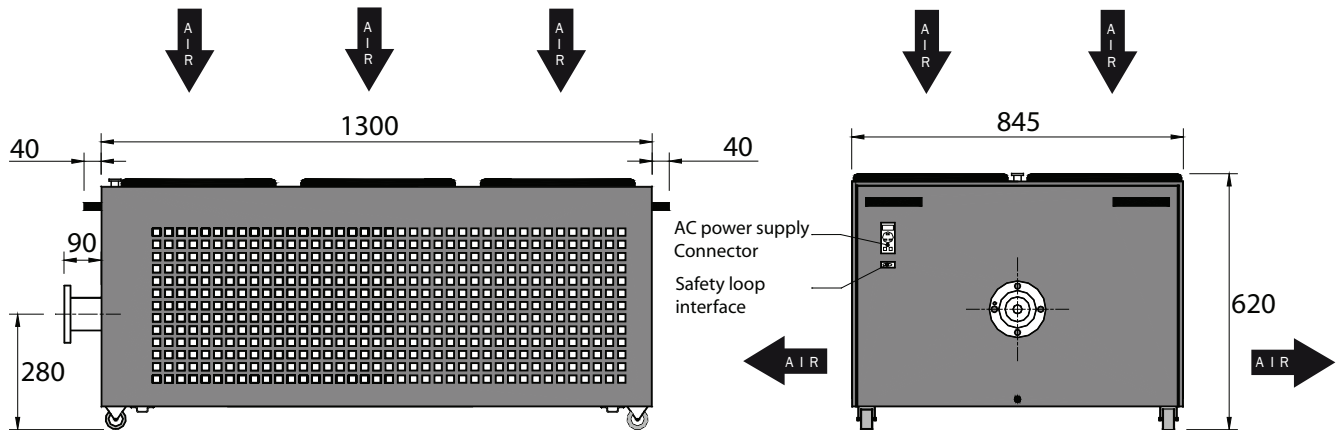

Standards
NF C 96-315
MIL-DTL-39030

Impedance	50 $\Omega \pm 5\%$
Frequency	DC - 800 MHz
Max VSWR	≤ 1.15 at 800 MHz
Average power @ 25°C	75 kW (Potable water) 60 kW (Mixture with 35% ethylene glycol)
Cooling	Water + forced air
Potable water	7 < pH < 8.2, mineral salts concentration < 75 ppm
Weight	120 kg

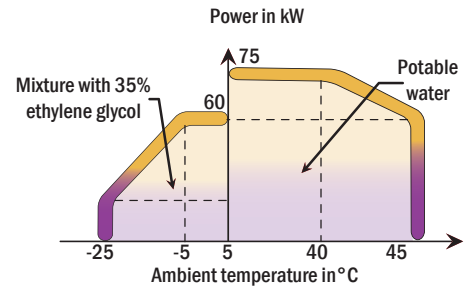

Dimensions in mm

P/N	Connector	AC power supply
17-6752	EIA 6.1/8"	220 V - 50 Hz
17-0676	EIA 6.1/8"	115 V - 60 Hz

»