




Standards
NF C 96-314
MIL-DTL-15370



Impedance 50 Ω
Phase variation ≤ 1.5°
Insertion lost ≤ 0.3 dB
Temperature range -25 to 85°C

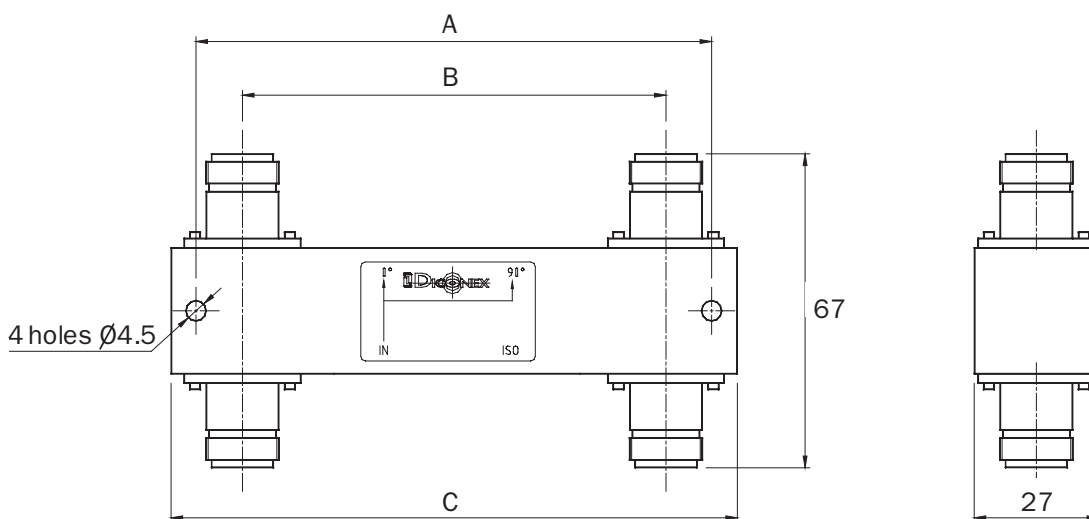

Dimensions in mm

P/N	Frequency (MHz)	Max VSWR	Coupling (dB)	Isolation (dB)	Power (W) @ 25°C	Connector	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Weight (g)
29-0059	380 à 395	≤ 1.1	3 ± 0.5	< -33	500	Nf	120	92	135	70	34	400
29-0060	380 à 395	≤ 1.1	20 ± 0.7	< -50	500	Nf	120	92	135	70	34	400
29-3388	430 à 860	≤ 1.1	3 ± 0.5	< -26	500	Nf	97	77	108	67	27	375
29-0024	450 à 900	≤ 1.1	3 ± 0.5	< -26	300	Nf	93	73	104	67	27	350
29-0023	GSM - DCS	≤ 1.15	3 ± 0.7	< -23	50	Nf	59	39	70	67	27	250
29-0054	470 à 860	≤ 1.1	6 ± 0.5	< -30	500	Nf	93	73	104	67	27	350
29-0055	470 à 860	≤ 1.1	6 ± 0.7	< -30	1000	7-16f	93	93	121	74	37	675

Model available with 7-16 connector

