


50 W 9 GHz BeO Chip Termination





Standards
NF C 96-315
MIL-DTL-39030
2015/863/EU RoHS



News

Substrate
Resistive film
Protection film
Contacts finition
Size

BeO
Thick film
Overglaze
Pt/Ag
2016

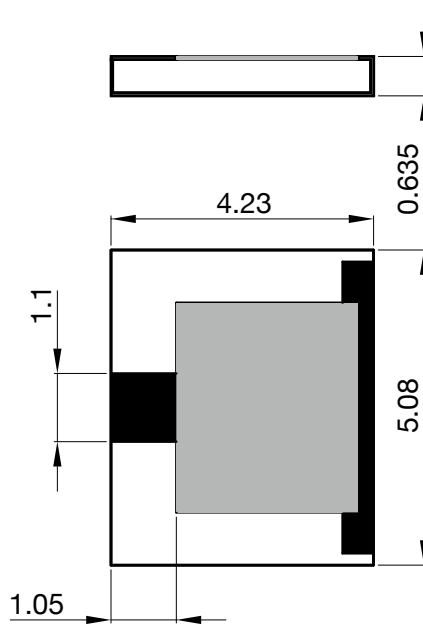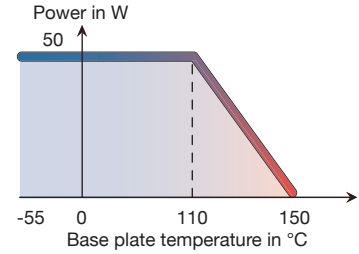

Dimensions in mm

| P/N | Frequency (GHz) | Power (W) | Impedance ($\Omega \pm 5\%$) | Max VSWR |
|----------|-----------------|-----------|--------------------------------|----------|
| 48-0342Y | 9 | 50 | 48.5 | 1.20 |
| 48-0342* | 9 | 50 | 48.5 | 1.20 |

| mm | inch |
|-------|-------|
| 0.635 | 0.025 |
| 1.05 | 0.041 |
| 1.1 | 0.043 |
| 4.23 | 0.166 |
| 5.08 | 0.2 |

* Space grade