



160 W 5 GHz 3dB BeO



Standards
NF C 96-315
MIL-DTL-3933

News

Substrate	BeO
Resistive film	Thick film
Protection film	Overglaze
Contacts finition	Pt/Ag
Size	3535

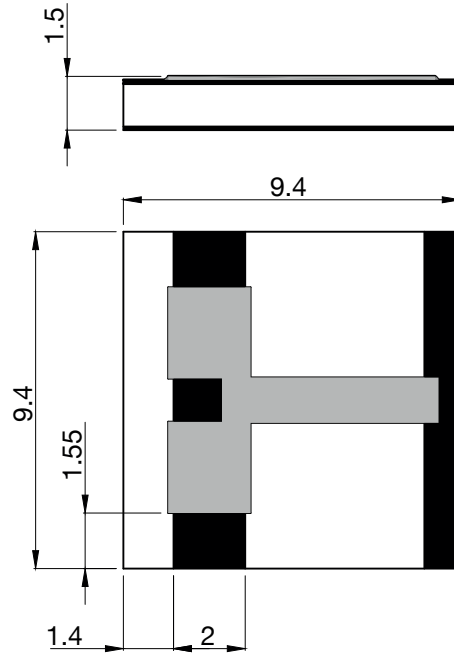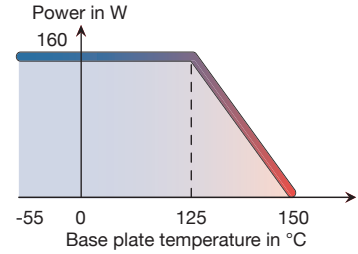

Dimensions in mm

P/N	Attenuation** (dB)	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR	Accuracy $\pm \Delta\alpha$ (dB)
43-0166 B	3	5	160	50	1.20	0.3
47-0166 B*	3	5	160	50	1.20	0.3

mm	inch
1.4	0.055
1.5	0.059
1.55	0.061
2	0.079
9.4	0.354

* For Space application
** Others values on request