



400 W 1.6 GHz 3dB BeO



Standards
NF C 96-315
MIL-DTL-3933

News

Substrate	BeO
Resistive film	Thick film
Protection film	Overglaze
Contacts finition	Pt/Ag
Size	5050

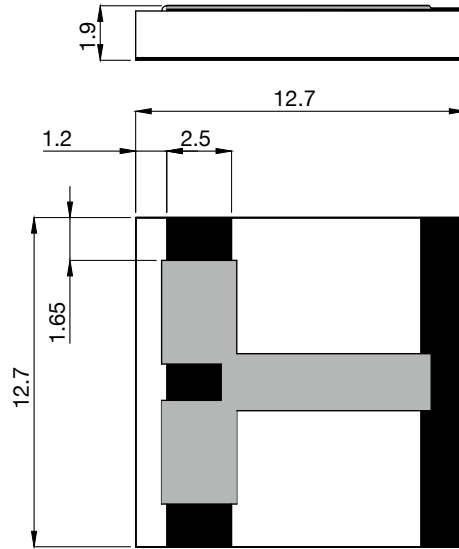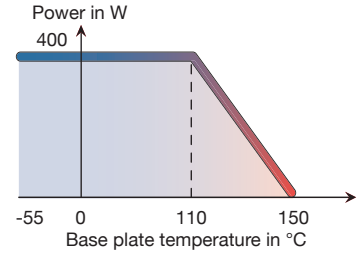

Dimensions in mm

P/N	Attenuation** (dB)	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR	Accuracy $\pm \Delta\alpha$ (dB)
43-0211	3	1.6	400	50	1.15	0.2
47-0211*	3	1.6	400	50	1.15	0.2

mm	inch
1.2	0.047
1.65	0.065
1.9	0.075
2.5	0.098
12.7	0.5

* For Space application
** Others values on request