

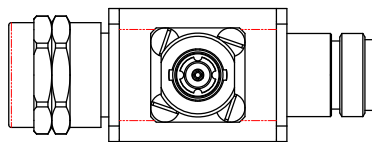


Coupling loop 100-500 MHz



Impedance	50 Ω
Frequency	100 - 500 MHz
Max VSWR	< 1.1
Max coupling @ 110MHz	-53 dB
Isolation	> 20 dB
Insertion loss	< 0.3 dB
Power @ 25°C	50 W
Temperature range	-55 to +125°C
Connectors	N m/f
Weight	120 g

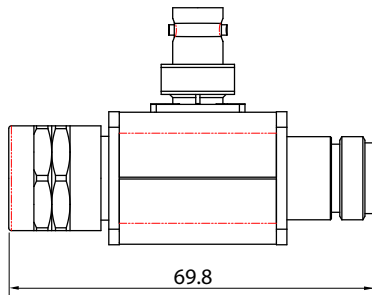

Dimensions in mm

P/N	Model
30-0149	Coupling loop 100 - 500 MHz