


Jumper 1/4" SuperFlex Straight



Impedance	50 $\Omega \pm 2\%$
Frequency	DC ~ 4 GHz
Intermodulation IM3*	≤ -160 dBc for 2 carriers at + 43 dBm
Cable minimum bending radius	45 mm (repeated) / 25 mm (single)
Operating temperature range	- 40 °C + 70 °C
Protection level	IP 67

Frequency (GHz)	Return loss (dB)	Attenuation (dB/m)
< 1	< -32 dB	0.20 +0.1
< 2.2	< -30 dB	0.30 +0.1
< 4	< -22 dB	0.42 +0.1

* Inner and outer cable conductors 100 % soldered to the connector

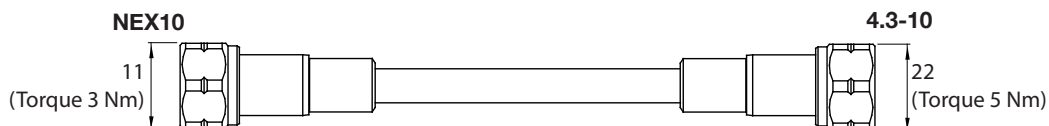

Dimensions in mm

P/N	Straight male type cable assemblies
Lenght	NEX10 m to 4.3-10 m
1 m	20 512 078
2 m	20 511 820
3 m	20 511 885
4 m	20 511 821
5 m	20 512 090
6 m	20 512 079

Consult us for other lenght