

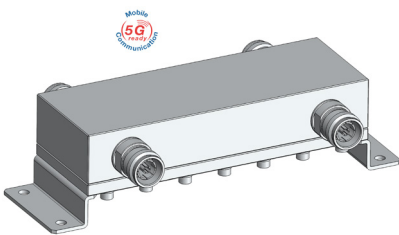


698 - 3800 MHz Hybrid

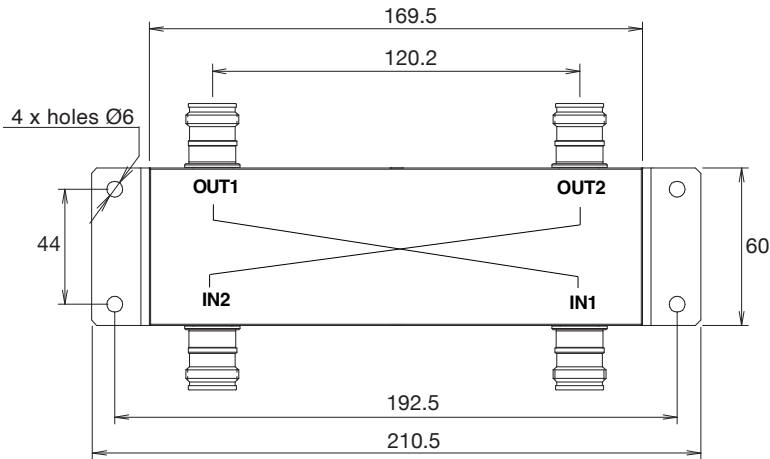

Frequency	698-3800 MHz
Impedance	50 Ω
Intermodulation IM3	≤ -160 dBc for 2 carriers at +43 dBm
Temperature range	- 30 to +70°C
Average power	
- If used as a combiner (2 $\rightarrow$ 1)	100 W
- If used as a divider (1 $\rightarrow$ 2)	200 W
Protection level	IP 65
Color	White RAL 9002
Weight	1.1 kg

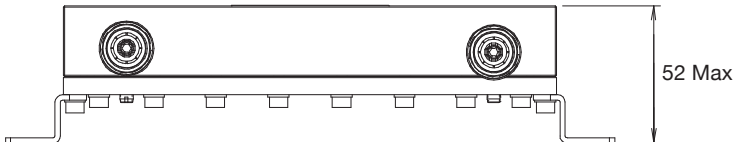

Dimensions in mm

[Return to Search by Part Number](#)

P/N (4.3-10f)	P/N (7-16f)	Coupling (dB)	Frequency (MHz)	Δ Coupling (dB)	Isolation (dB)	Max VSWR
14 900 272	14 900 262	3	698-3800	± 0.8	≥ 20	1.25