


1850W 2.3dB BeO





Standards
NF C 96-315
MIL-DTL-3933



Substrate
Resistive film
Tab/Plating
Mounting flange/Plating
Cover substrate
Size

BeO
Thick film
 CuBe_2 / Ag
Cu/Ni
 Al_2O_3
190104

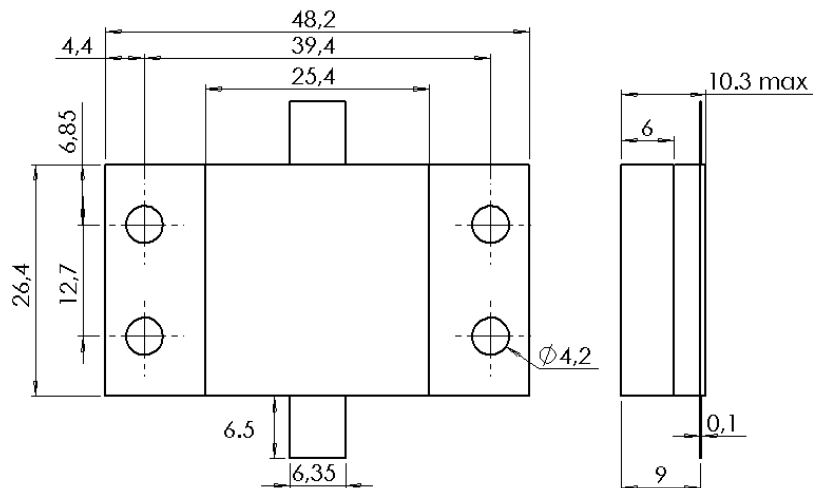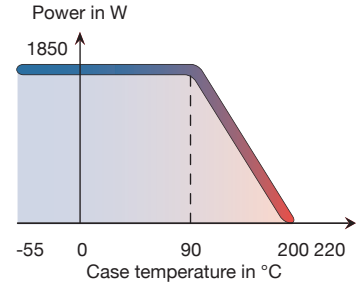

Dimensions in mm

P/N	Attenuation (dB)	Frequency (MHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR	Accuracy* $\pm \Delta \alpha$ (dB)
16-7184	2,3	500	1850	50	1,06	0,3

mm	inch
0.1	0.004
4.2	0.165
6	0.236
6.35	0.250
6.5	0.256
6.85	0.270
9	0.354
10.3	0.406
12.7	0.500
25.4	1.000
26.4	1.040
39.4	1.551
48.2	1.898